

Band II 2 dipoles horizontal polarization panel • Especially suitable for square masts  
Light construction

### Electrical Specifications



Frequency range	87.5-108 MHz	
Peak gain	7.5 dB (ref. $\lambda/2$ dipole)	
3 dB beam width	E-plane: 70°	H-plane: 55°
Polarization	Horizontal	
Impedance	50 Ohm	
VSWR	≤1.2:1	
Maximum power handling	2.5 kW	
Connector type	DIN 7/16	
Pressurization	Non pressurized	

### Mechanical & Environmental Specifications

Materials	Reflector & dipoles Feed points radome	Hot dip galvanized steel ABS / MMA UVA high protection
Dimensions (W x D x H)	1700 x 781 x 2214 mm	
Maximum wind speed	200 km/h	
Wind load (front)	1300 N (@160 km/h)	
Wind load (lateral)	592 N (@160 km/h)	
Weight	36 Kg	
Typical mounting	Square arrangement tower	
Clamp type	To Ø 80 – 115 mm pipe	
Vertical spacing	3200 mm	
Grounding	DC grounded	
Temperature range	-40°C to +80°C	
Humidity	100%	

### Antenna System Characteristics

Number of Bays	Number ant. per bay	Peak gain (dBd)	Weight (kg)	Wind load (@160 km/h)	System height (mm)
1	2	6.0	72	1.9 kN	2214
	3	4.2	108	2.5 kN	
	4	3.0	144	3.1 kN	
2	2	9.0	144	3.8 kN	5414
	3	7.2	216	5.0 kN	
	4	6.0	288	6.2 kN	
4	2	12.0	288	7.6 kN	11814
	3	10.3	432	9.9 kN	
6	2	13.8	432	11.4 kN	18214
	3	12.0	648	14.9 kN	
	4	10.8	864	18.8 kN	
8	2	15.0	576	15.1 kN	24614
	3	13.3	864	19.8 kN	
	4	12.0	1152	25.1 kN	

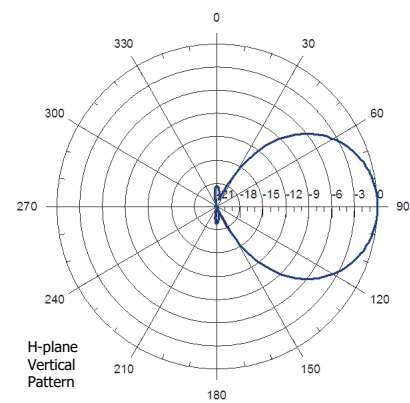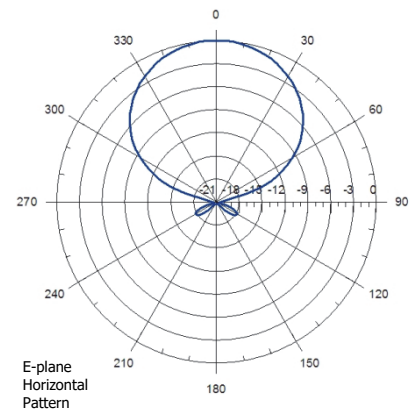

**NOTES:**

- Table supplies data up to 8 bays only for simplification purposes; systems with more bays are available.
- Null fill, beam tilt, harness & feeder losses NOT INCLUDED.
- Wind load & weight figures without considering cables, splitters & hardware.